





Universal Clips

The Largest Manufacturer of Worm-drive Hose Clamps in Southern Africa.

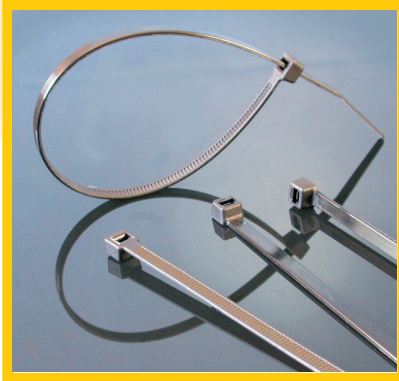

NYLON Cable Ties

Cable Ties are primarily designed for the easy permanent installation of electric cables & wiring but can also be used for a thousand different

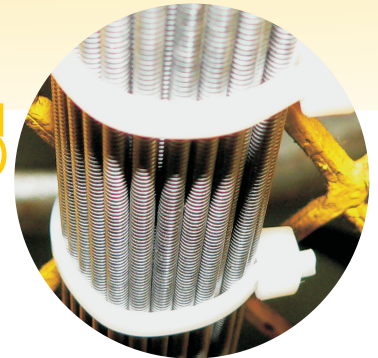


applications, from securing ropes, fencing, bags, pipes and timber, etc. Temporarily they can also be used to tidy up material or provide support and temporary repairs.

Cable Ties are manufactured from polyamide 6.6 and, are naturally UV stabilised, making them suitable for outdoor use.

WITH 1001 USES

- Cable Ties are resistant to most substances. Exceptions are inorganic acids, cresols, oxidizing agents and chlorine based solvents.
- Ties remain stable in temperatures from - 30 to 85 degrees

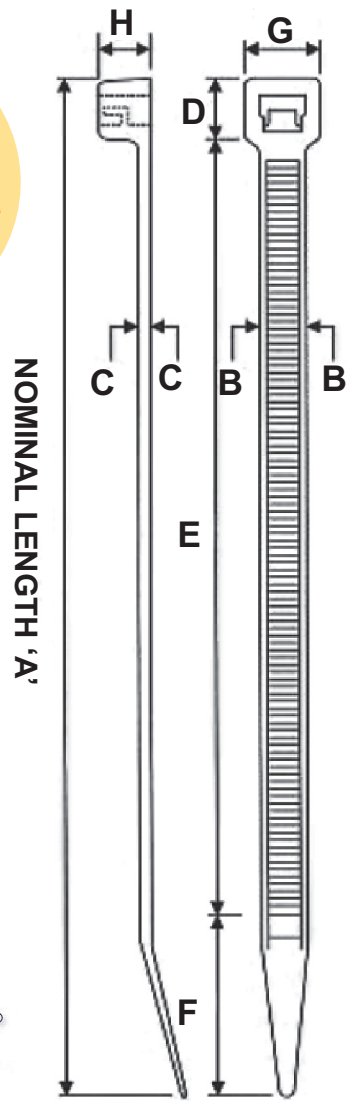

DIMENSION CHART mm											S*
	A	B	C	D	E	F	G	H	Ø _{min}	Ø _{max}	kg
CB 1	100	2.5	0.1	4.5	78.0	16.5	4.5	3.7	2	20	8.2
CB 2	150	3.6	1.3	6.0	117.0	26.5	6.1	4.8	3	35	13.6
CB 3	200	4.8	1.3	7.4	161.0	28.0	7.6	5.2	4	50	22.7
CB 4	300	4.8	1.3	7.4	259.5	28.0	7.6	5.2	4	80	22.7
CB 5	400	4.8	1.3	7.4	360.5	28.0	7.6	5.2	4	110	22.7
CB 6	300	7.9	2.0	10.6	259.5	29.5	12.5	8.3	10	80	54.5
CB 7	400	7.9	2.0	10.6	356.0	29.5	12.5	8.3	10	110	54.5
CB 8	500	7.9	2.0	10.6	455.0	29.5	12.5	8.3	10	140	54.5
CB 9	440	13.0	2.0	16.0	380.0	44.0	18.0	12.0	40	120	110.0
CB10	540	13.0	2.0	16.0	480.0	44.0	18.0	12.0	40	150	110.0

S = Minimum tensile or clamping strength • 1kg = 9.81 Newtons

Other sizes available on request.

Quantities per pack :

CB 1 to 8 = 100 CB 9 & 10 = 50

Manufactured from polyamide in accordance with specification MIL-S-23190 E-MS 3367

- Flammability rating UL - 94V-2



Clamps that Torque-up & Grip-Tight. Hoses know!

Universal Clips CC

Reg No 2006/107878/23

E&OE

6 Factory Street, Industria North, Johannesburg •

P O Box 58124, Newville, 2114 • E-mail:uniclips@uniclips.co.za

Tel: +27 11 477-1310 Telefax: +27 11 477-7642 /7476